

UKKO



UKKO LED High bay luminaire is designed to replace traditional HID High bays.

Two different sizes, several mounting options, lumen packages and optical systems make the UKKO High bay a multi-functional tool that provides the right solution for a variety of applications in industry, logistics and sports.

Flat-shape design gives the flexibility to install the luminary by hook, pendant or bracket.

There are several optical solutions to choose from. Innovative anti glare unit makes the light more comfortable and safer, especially in UGR sensitive applications.



UKKO



Luminous flux	14,500lm - 36000lm
Correlated color temperature	3000K, 4000K, 5000K, 6000K
Light source	Integral LED module
Optics	60°, 70°, 90°, 150°
Housing	ADC12 die-cast aluminium
Cover	5mm tempered glass / PMMA lens
Screws	304 stainless screws
Driver	Meanwell/Inventronic/Signify
Electrical	Class I
Input voltage	90-305VAC / 50-60Hz
Surge protection	Optional
Dimming	1-10V / DALI
External cable	2m (other length available upon request)
Lifetime	100,000 hours (at 25°C).
Light fitting protection	IP66; IK08 (09 and 10 on request), C3 anti corrosion class as standard
Operating temperature	-30° to 50C°
Standards	IEC/EN
Country of origin	Made in EU
Certificates	CE, Ball Test

OPTIONAL FEATURES

- Antiglare unit





UKKO



Name	Luminous flux netto (lm)	Power (W)	Efficacy (lm/W)	Standard CCT (K)
UKKO 100	15000	100	150	4000
UKKO 150	22500	150	150	4000
UKKO 200	30000	200	150	4000
UKKO 240	36000	240	150	4000

Name	Luminous flux netto (lm)	Power (W)	Efficacy (lm/W)	Standard CCT (K)
UKKO 150 AG	17500	150	145	4000
UKKO 200 AG	29000	200	145	4000
UKKO 240 AG	34800	240	145	4000

AG = Anti-Glare Shield

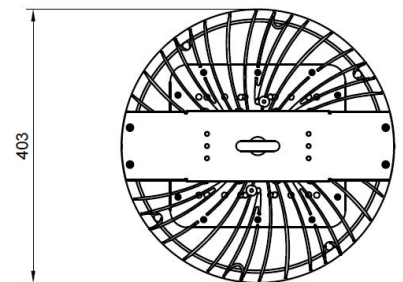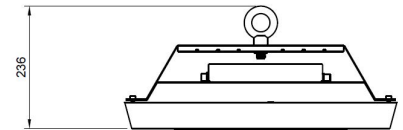

UKKO 100/145

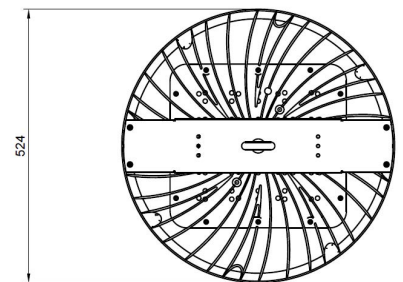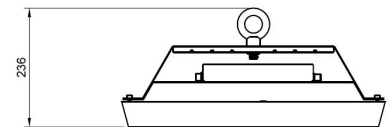

UKKO 200/240